



Distributor for:

*Multotec Process Equipment
Multotec Wear Linings
PrepQuip (Pty) Ltd.
CLIMAX_x Equipment Company*



preptech.INC.

www.preptech.com

888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

PrepTech, Inc.

Index	Page
Cyclones	3
Dense Medium	4
Classifying	6
Spirals	7
Coal	8
Mineral	12
Ceramic Impellers	14
Froth Flotation Column	16
TH Filterpress	18
In-line Guard Screen	20
Magnetic Separator	22

PrepTech, Inc., established in 1997, serves the coal and mineral processing industry.

Engineering

PrepTech offers engineering services:

- Bid specification packages, including balanced flowsheets and plant layouts
- Computer simulation and optimization of cleaning plant flowsheets

Equipment

PrepTech also represents several equipment manufacturers:

- Multotec Process Equipment (Pty) Ltd. of Kempton Park, RSA
- Multotec Wear Linings (Pty) Ltd. of Pretoria, RSA
- PrepQuip (Pty) Ltd. of Kempton Park, RSA
- CLIMAX_x Equipment Company, Inc. of Pittsburgh, PA

Testing Facilities: Test spirals are available for in-plant testwork or testing at our warehouse in Monessen, PA. A pilot-scale filterpress and a pilot-scale froth flotation column are also available.

Service and Parts Inventory: PrepTech offers after-sales service for all products. A parts and equipment inventory is maintained at PrepTech's warehouse in Monessen, PA.

Contact PrepTech :

Toll free 888.447.7737

Headquarters in Apollo, PA

Phone 724.727.3439

Fax 724.727.2532

Warehouse in Monessen, PA

Phone 724.684.4577


Fax 724.684.6877

Multotec Cyclones




Multotec Cyclones—Dense Medium and Classifying

PrepTech offers Multotec high-alumnia ceramic lined *dense medium* (heavy media) cyclones and a variety of *classifying* cyclones:

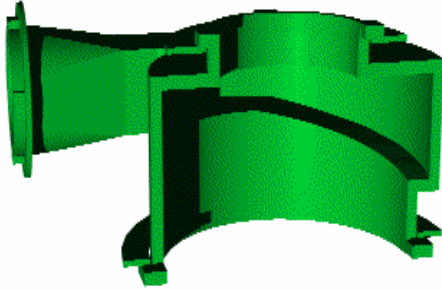

- ceramic lined,
- rubber lined--used extensively in the sand and gravel industry
- polyurethane--most notably, the VV165 cyclone (6.5-in diameter) in use in many coal preparation plants for desliming at 325 mesh prior to flotation

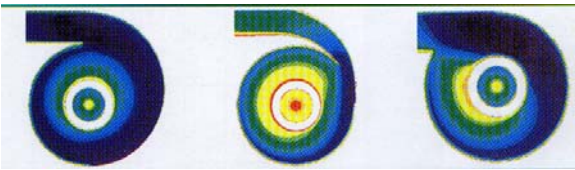

A—Scrolled Evolute Velocity Profile.

The feature that sets the Multotec cyclone apart is the inlet head design. The Scrolled Evolute design gives a cyclone with a higher capacity compared to other common designs. This is a direct result of the reduction in turbulence at the cyclone inlet. Velocity profiles for these inlets confirm the finding that vortex finder wear is almost non-existent.




Dense Medium Cyclones

Dense medium cyclones are available in a wide range of sizes (up to 1,450 mm diameter!) and with various inlet and vortex finder configurations. Cyclones are selected for each application based on:

- feed tonnage
- topsize
- yield—critical in determining the proper apex size
- coal (or ore):medium ratio
- particle size distribution

A mild steel shell is lined with engineered, high-alumnia ceramic tile. A stainless steel shell is offered for high corrosion applications.


Multotec Cyclones—Dense Medium

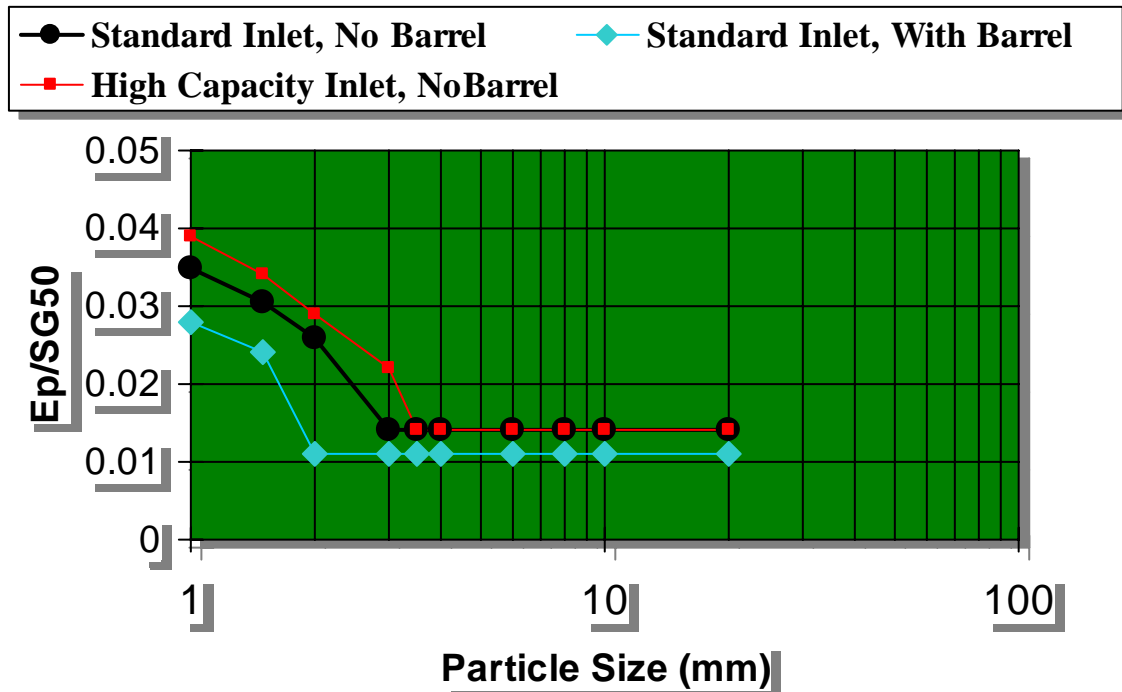

Dense Medium Cyclone configurations are selected to match each application for performance, as well as capacity.

Examples of Dense Medium Cyclone Capacity at 9D Cyclone Head and 1.5 s.g. Coal					TPH Capacity @ 4:1 M:C		
Cyclone Model	Diameter (mm)	Diameter (in)	Inlet Type	Medium S.G.	1.4	1.5	1.6
					75	79	83
MA510-20-1	510	20.1	A		62	66	69
MA510-20-1	510	20.1	AB		50	52	55
MA510-20-1	510	20.1	B		133	141	148
MA660-20-1	660	26.0	A		111	117	124
MA660-20-1	660	26.0	AB		89	94	99
MA660-20-1	660	26.0	B		206	218	230
MA800-20-1	800	31.5	A		172	182	192
MA800-20-1	800	31.5	AB		138	146	153
MA800-20-1	800	31.5	B				

Multotec Cyclones—Classifying

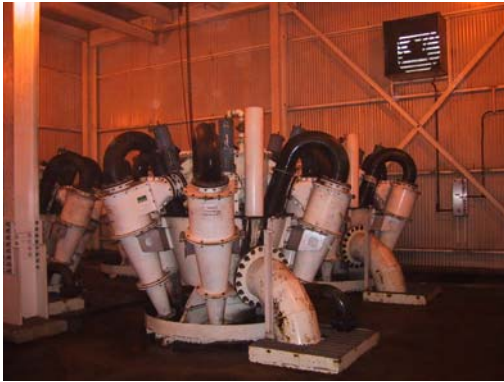

Classifying Cyclones

PrepTech offers a wide range of Multotec classifying cyclones to suit every need. Cyclones sizes and configurations are selected based on Multotec's "New Plitt" formula.

High Capacity Ceramic

For typical classifying cyclones applications in coal, the new "HA" range of cyclones is offered. These feature high-alumina tile linings throughout the body, a monolithic alumina body cone and apex, and a polyurethane vortex finder. Mild steel shells are standard; however, fibre-reinforced composite shells are offered for high-corrosion applications.


These will replace the Multotec "SC" or silicon carbide lined cyclone range for typical fine coal classification.

Rubber-lined

For many sand and gravel applications, rubber-lined cyclones are preferred. PrepTech offers a complete size range of Multotec rubber-lined cyclones. Both mild steel and fibre-reinforced composite shells are available.

Polyurethane Cyclones for Desliming

Desliming prior to froth flotation has begun to be a popular choice for some coals. The VV165 (6.5-in diameter) classifying cyclone is the choice for this duty. A Tromp curve from a VV165 cyclone test (intermediate vortex finder, 25 psi, 20 mm apex) is given to the left. The measured capacity of the cyclone under these conditions is 208 gpm.

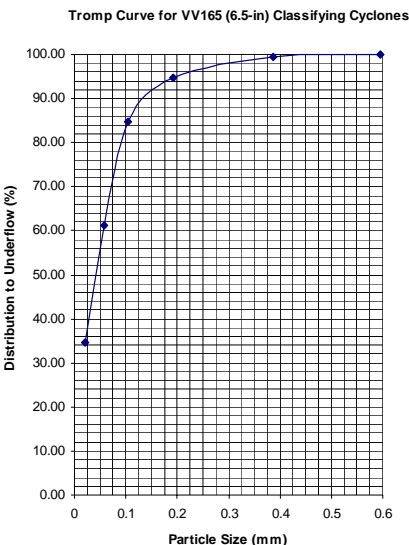

Multotec Spiral Concentrators




preptech.INC.

www.preptech.com

888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

Multotec Spiral Concentrators--Coal

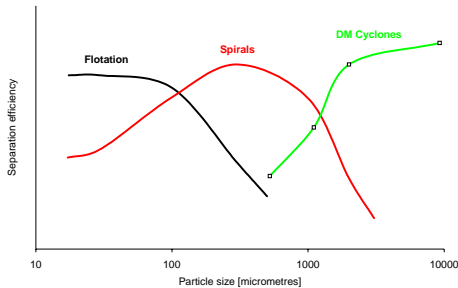

Types of Coal Spirals Available:

- SX4—Single-stage, 4-turn spiral
- SX7—Two-stage, 7-turn spiral
- Available in single start, double start and triple start configurations
- Up to 12 spiral assemblies or 36 starts in a bank

What are Spirals?

- Flowing film concentrator
- Relatively low capital cost (+/- \$700-\$900/tph capital for single stage)
- Virtually no operating cost (reagents, consumables, power, wear)
- Handle oxidized/weathered coal
- Robust and simple to operate
- Generally treat 1.0 x 0.1 mm (16 x 150 Mesh)
- Allow heavy media cyclones to clean down to 1 mm—more efficient desliming and media recovery
- Allow froth flotation to clean minus 150 Mesh—better flotation of finer particles

Unique Feature of Multotec Coal Spirals:

Auto Reject Channel


- Improved removal of high density particles without auxiliary splitters
- Improved removal of misplaced material through circular transversal flow
- Higher reject capacity
- Less sensitive to beaching of coarse particles

Operating Criteria

FEED SIZE	-1.0+0.1	mm
DRY FEED	2.5-3.5	TONS
SLURRY VOLUME / START	35	GPM
FEED % SOLIDS	25 - 35	W/W

Multotec Spiral Concentrators--Coal

Benefits of Two-Stages of Coal Spirals

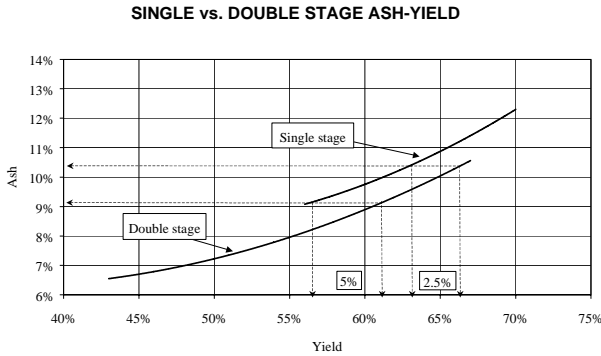


Prinsloo and Abela. 1998

- Two-stages found to be more efficient than single-stage (Prinsloo and Abela, 1998)
- Improvements between 2.5 and 5 percentage points in yield at same ash
- Luttrell et al. (1998) found the rougher-cleaner with middlings recycle circuit to be the most cost-effective of the more efficient circuits from a theoretical perspective. In practice, they calculated a 3.8% yield increase at the same ash content.

Circuit	Flow Diagram	Relative Efficiency
Rougher		1.00
Rougher Cleaner With recycle		1.33
Rougher Scavenger With recycle		1.33
Rougher Scavenger Cleaner With recycle		2.00
Rougher Cleaner with Middlings Redclean		1.00
Rougher Cleaner Without recycle		1.00
Rougher Cleaner with Middlings Recycle		1.22

Luttrell et al., 1998

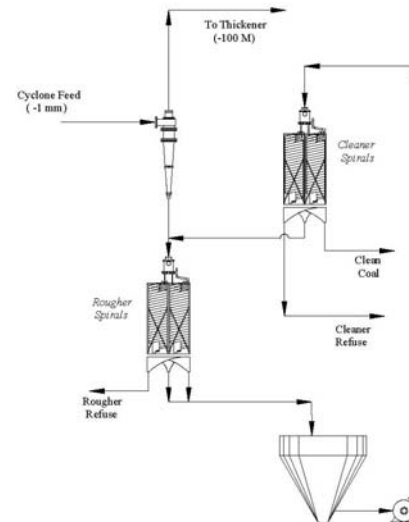


Rougher-cleaner with middlings recycle as two stages of spirals

Prinsloo, T.R., and Abela, R. L. 1998. Multiple Stage Fine Coal Spiral Concentrators. *Proceedings of the International Coal Preparation Congress*, Brisbane.

Luttrell et al. 1998. Improving spiral performance using circuit analysis. *Minerals & Metallurgical Processing*. November, Vol. 15, No. 4, pp. 16-21.

Multotec Spiral Concentrators--Coal

Benefits of Two-Stage Coal Spirals (SX7)

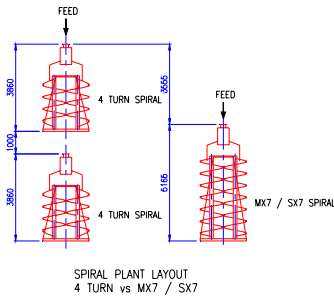

- Advantages of double stage circuit, but in one spiral assembly
- Reduce cost while improving performance
- Reduction in capital equipment cost, overall plant height and floor area

SX7 Two-stage Coal Spiral

- Four spiral turns followed by removal of a primary refuse
- Remixing of middlings and clean coal followed by three spiral turns
- Stream is split into secondary refuse, middlings and clean coal
- Middlings to be recycled to feed



Recent Performance Data

- Recent efficiency values achieved with SX7 in plant circuits (1 x 0.1 mm)
 - 0.094 at 1.83 separating gravity (generalized probable error, Epm = 0.051)
 - 0.122 at 1.82 separating gravity (generalized probable error, Epm = 0.067)
 - Note: typical single-stage Epm ~0.10

Multotec Spiral Concentrators--Coal

Benefits of Two-Stage Coal Spirals (SX7)

Overall Plant Benefits

- Allows DMC to process only down to 1 mm size—more efficient desliming, more efficient media recovery
- Often allows coarse coal circuits to operate at higher separating gravities because the finer fraction is cleaned more efficiently—greater recovery of coarser, lower moisture coal (incremental inerts=moisture + ash)
- *Coal Leader*, July 2003 reports:
 - Spiral circuit yield increase of 5.7%.
 - At 45 tph, this increase at \$25/ton and 5,500 tpy gives \$350,000/year
 - Spiral cutpoint dropped to 1.66 s.g., allowing the heavy medium s.g. to increase giving 13 tph more clean coal in that circuit for a total impact of \$1.79 million per year.
 - Cost for the spiral installation was \$140,000.
- *Coal Prep 04*, Bethell and Dehart:
 - Hobet processes 5.4 million raw tpy
 - Addition of SX7 spirals, clean coal effluent cyclones, and fine wire sieving
 - Plant yield increased by 28 tph or 105,000 tpy
 - At a market value of \$35/ton, a net revenue increase of =/-\$3.7 million/year will be realized, providing a payback of +/-3 months on the capital spent
- As of November 2004, installed capacity is 636 SX7 starts, treating approximately 1,590 tph at 2.5 tph/start

Multotec Spiral Concentrators--Minerals



Types of Mineral Spirals Available:

- High grade and low grade
- 3, 5 and 7-turn spiral
- Available in single start, double start and triple start configurations
- Up to 12 spiral assemblies or 36 starts in a bank

New High Capacity Mineral Spiral Design: SC22


The Multotec SC22 Spiral Concentrator has been developed with the aim to optimise the following criteria:

- Separation performance
- Reliability
- Cost-effectiveness
- Capacity



The SC22 Spiral Concentrator has a $7\frac{3}{4}$ turn helix with an overall height of 3850 mm (152 in) and a diameter of 660 mm (26 in).

Spiral troughs are manufactured from high-quality polyurethane resin with a fibreglass backing. The combination of raw materials used in the production of Multotec spirals has been proven to result in superior adhesion between the two layers, and delamination problems are virtually unknown. For maximum wear life, high-wear areas are manufactured with increased Polyurethane thickness.

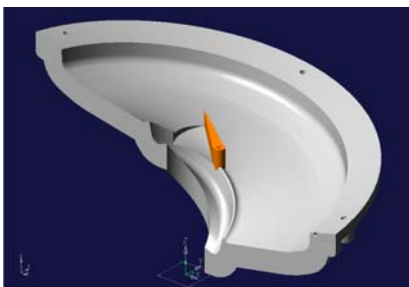

The auxiliary splitters of the SC22 Spiral Concentrator are moving on a flat surface which has a downward gradient towards the product gully which facilitates product removal while allowing for easy adjustment and operational stability. The heavy-duty splitter body is mounted on a 316 stainless steel shaft, thus providing a robust and corrosion-resistant unit.

Multotec Spiral Concentrators--Minerals



Unique Design: Adjustable intermediate tailings reject port

Consists of an inner and outer disk in eccentric configuration. The outer disk can be rotated in its seat in the spiral trough, and the inner disk can be rotated in the outer disk.

Operational advantages


- The circular, sealed design prevents the inside tracks from being exposed to slurry and solids, reducing the risk of blockage.
- No parts of the adjustment mechanism are protruding outside the spiral onto the walkway, which reduces the risk of injury or damage.

Metallurgical advantages

- The design of the tailings reject port allows independent adjustment of position and orientation of the tailings reject orifice.
- The design of the inner disk encourages preferential discharge of light particles while misplaced heavy particles are preferentially deflected from the tailings discharge.


Operating Conditions

- No wash water required
- Capacity: up to 4.5 stph (4 MtpH) solids depending on application; typical 2 to 2.7 stph for most applications
- Pulp density: 30 – 50% by mass
- Size range: max 2 mm, depending on density
- Pulp volume: max 26 USgpm (6 m³/h)

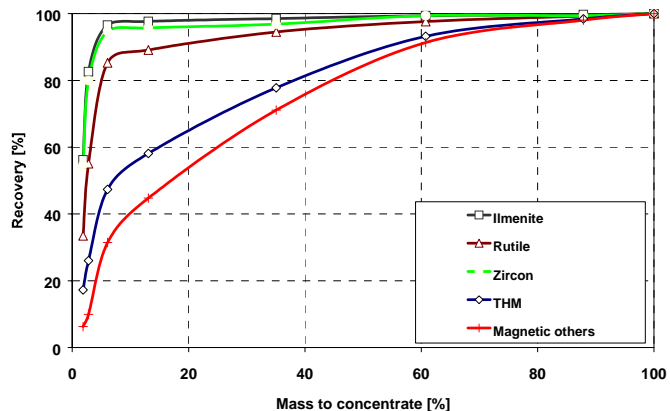

Performance evaluation of SC22 Spiral Concentrator in a large South African heavy mineral application (plant data). Operating load is approx 2.4 stph solids.

Multotec Ceramic Impellers

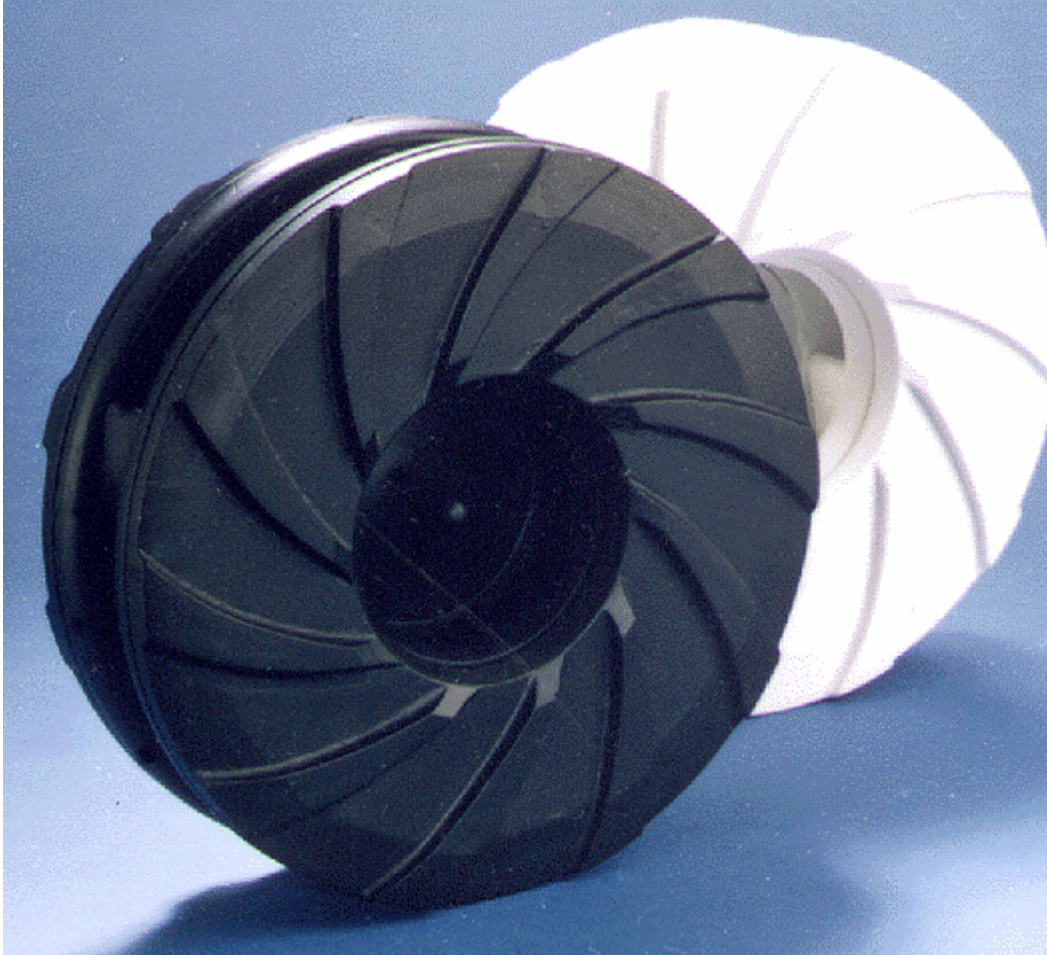

preptech.INC.

www.preptech.com

888-447-7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA

Multotec Ceramic Impellers




Advantages:

- Impeller life in excess of 6 times that of Ni-hard steel or polymers
- Approximately half the weight of steel
- Less down time
- Lower maintenance costs
- Extended, more consistent yield
- Less re-circulation = Longer pump life

Features:

- Alumina-Epoxy-Steel composite
- Individually balanced
- Pump curves are available
- Compatible with existing pumps

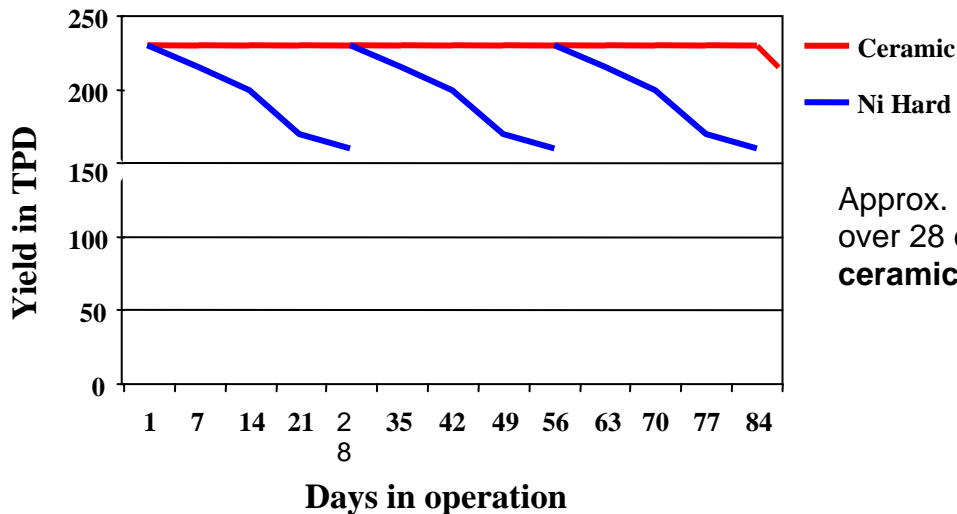

Approx. **35%** yield loss per **steel** impeller over 28 days compared to **2%** for the **ceramic** impeller over 84 days



PrepQuip Froth Flotation Column




preptech.INC.

www.preptech.com
888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

PrepQuip Froth Flotation Column

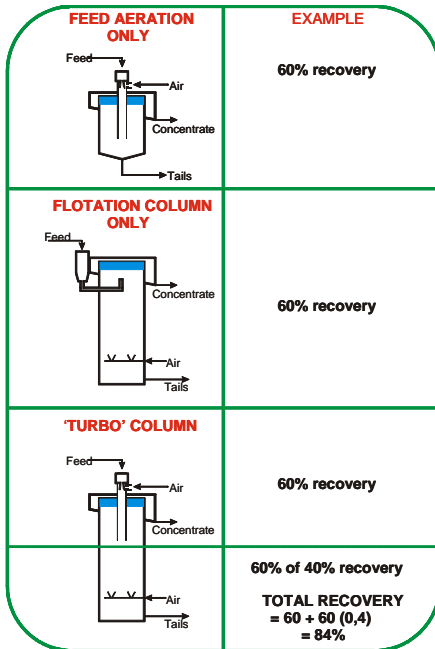

Two Types are Available

- Conventional

Suitable for easy applications due to single aeration.

- Turbo

Supercharged unit for difficult applications.


Applications include metal concentrates and minerals

Column Features

- Internal froth launders
- Froth washing
- Air spargers
- Interface level controllers
- No moving parts
- Lower reagent consumption
- Low energy consumption
- Reduced downtime
- Lower residence time
- Higher gas hold-up



Plant Design

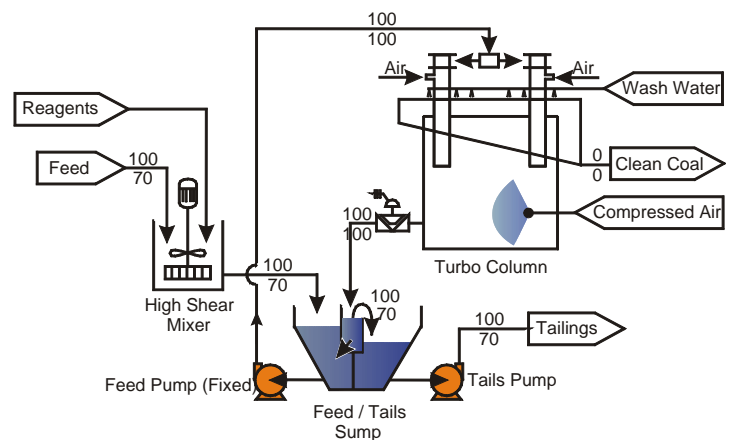



PrepQuip TH Filterpress



preptech.INC.

www.preptech.com

888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

PrepQuip TH Filterpress



- Manufactured by TH (Spain)
- The TH Press Features
 - Fully automatic
 - Hydraulic system (low power req.)
 - Hydraulic driven feed pumps
 - Fulcrum design
 - Plates from Polypropylene, Mild or 304/316 Stainless Steel
 - Filter area : 1.4m² to 208 m²
 - Capacity : 1 to 85 tons dry solids/hr
 - 25mm rubber seals
 - Individual plate feeding
 - Cake discharge arrangement
 - Cloth washing system



- More than 154 units supplied world wide

- Applications include metal concentrates, minerals, metallurgical, effluents



- Filters sold to

- Copper	- Coal
- Chrome	- Quarry Stone
- Scrubber Dust	- Limestone
- Glass polishing	

- Coal applications
 - More than 75 units
 - More than 1,100 tons dry solids/hr
 - Largest Installation worldwide:
 - China National Coal
 - 240 Tons/hour
 - 15 x 18-S3 Filter Units



PrepQuip In-line Guard Screen



preptech.INC.

www.preptech.com

888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

PrepQuip In-line Guard Screen



GUARDS AGAINST

- Damage due to oversize debris
- Downtime caused by oversize debris

APPLICATIONS

- Metal concentrates, Minerals, Effluents, Equipment protection

RANGE OFFERS

- Line sizes : 80 to 500mm (3 to 20 inches) NB. Larger sizes available on request
- Capacities : 41 to 1590 m³/hr (180 to 7000 gpm)
- Screen apertures : 0.5mm, 1 mm, 3 mm, 5 mm, 10 mm
- Operating pressure : Up to 6 Bar (G) or 85 psig. Higher pressures available upon request.



DESIGN FEATURES

- Compact and heavy duty design
- Trouble free self cleaning and non-blinding wedge-wire screen
- Low pressure drop across the screen make it possible to retrofit (horizontal or vertical) into most existing pipelines
- Cylindrical screen manufactured from stainless steel wedge-wire to reduce wear and consequent maintenance
- Standard design for standard screen lengths
- Replaceable screen cartridge
- All wetted parts are rubber lined to assist in sealing as well as to assure durability
- Can be fully automated to integrate into existing control philosophy
- Pressure indicators upstream and downstream for pressure drop calculations (optional)



CLIMAX_x Magnetic Separator



preptech.INC.

www.preptech.com


888.447.7737

Monessen Riverfront Industrial Park
240 Riverview Drive, Monessen, PA 15062

The CLIMAX_x Magnetic Separator

The CLIMAX_x Magnetic Separator--Legend

- 1 Feed 2 Greater arc radius for magnets 3 Magnetics 4 High-efficiency magnet design
5 Submergence level 6 Overflow 7 Weir bars to vary overflow level
8 Overflow product to tailings (approx. 25%) 9 Underflow product to tailings (approx. 75%)

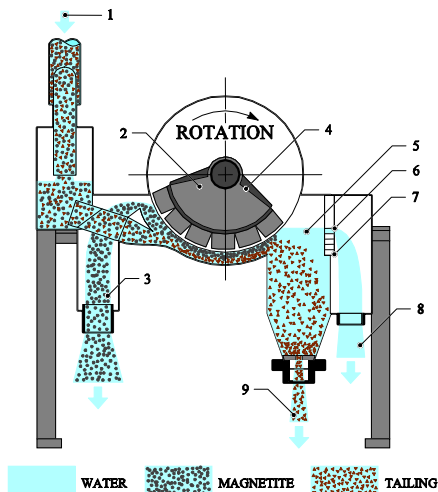

Technical Data

Drum Diameters	30"	36"
Drum Width	4'-10'	4'-10'

- 750 Gauss Interpole Magnetic Element
- Extended Arch, 6 Main Pole and 5 Interpoles
- All Stainless Steel Construction
- Greaseable Bearings
- 16 Gauge Wear Wrap

Operating Parameters

• Percent Solids in Feed	10 – 20 %
• Feed Slurry Volume	120–140 gpm/ft drum width
• Magnetic Load (max)	5.5 tph mag/ft drum width
• Magnetic Concentration (max.)	2.6 lb/gal
• Percent Nonmagnetics in Feed Solids	10 – 60 %
• Specific Gravity of Concentrates	2.2 – 2.6 SG

Performance

- Typical Magnetics Loss in Tailings is < 1 g/gal of Tailings

PrepTech, Inc., under license to CLI Corporation/Climax_x Equipment Company, sells the patented CLIMAX_x line of high-efficiency wet drum magnetic separators. The separator recovers magnetic media (magnetite or ferrosilicon) in dense media applications. The CLIMAX_x separator features a wide-angle magnet, assembled in a specially-designed tank, which improves recovery of fine magnetite or ferrosilicon. The magnetic media is then discharged at a higher than normal density. High concentrations of magnetic and nonmagnetic material in the feed are easily handled.

The patented design of the tailings removal system prevents plugging of the tailings spigots. Level control is flexible and does not require operator attention.



